


PD016016

Φ16mm PD planetary gearbox

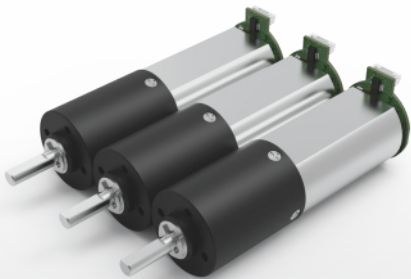


Gearbox Specifications

Outer diameter	16mm	Bearing	oil-impregnated bearings	Rolling bearing
Material	Plastic	Axial Play	≤0.3mm	≤0.3mm
Direction of rotation	cw & ccw	Radial Load at Output Shaft	≤10N	≤20N
Backlash	≤3°	Operating temperature range	-20 ~ +85°C	

Gearbox Stages	1	2	3	4
Reduction ratio	4 / 6	16 / 24 / 36	64 / 96 / 144 / 216	256 / 384 / 576 / 864 / 1296
Max rated torque of gearbox (gf.cm)	3000	3000	3000	3000
Max. intermittent torque (gf.cm)	6000	6000	6000	6000
Gearbox efficiency (%)	85	73	65	58
Gearbox length L1 (mm)	11.5	14.8	18.1	21.4

Technical Drawing

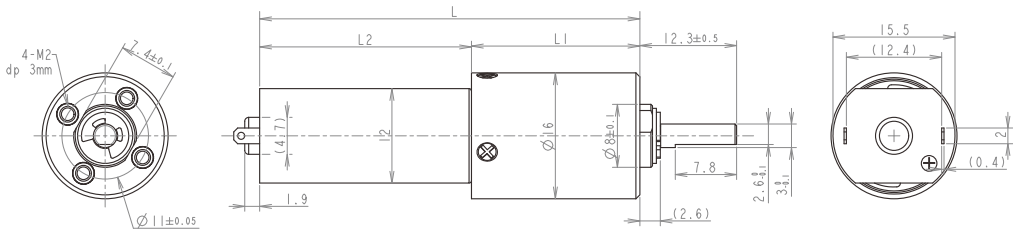

Motor Specifications

Motor type (optional)	Brushed DC motor, Brushless DC motor, Coreless motor, Stepper motor	Input speed	≤15000rpm
Voltage (optional)	3-24V	Load current	300mA max

Parameter (values at 6V & 8000rpm) The following data is for reference only.

Model	Rated Speed	Max Speed	Max. Rated Torque of Gearbox	Max. Intermittent Torque of Gearbox	Reduction Ratio	Gearbox Length	Overall Length
	rpm	rpm	gf.cm	gf.cm		mm	mm
PD016016-4	1875	7500	3000	6000	4	11.5	38.4
PD016016-6	1250	5000	3000	6000	6		
PD016016-16	469	1875	3000	6000	16		
PD016016-24	313	1250	3000	6000	24	14.8	41.7
PD016016-36	208	833	3000	6000	36		
PD016016-64	117	469	3000	6000	64		
PD016016-96	78	313	3000	6000	96	18.1	45.0
PD016016-144	52	208	3000	6000	144		
PD016016-216	35	139	3000	6000	216		
PD016016-256	29	117	3000	6000	256	21.4	48.3
PD016016-384	20	78	3000	6000	384		
PD016016-576	13	52	3000	6000	576		
PD016016-864	9	35	3000	6000	864		
PD016016-1296	6	23	3000	6000	1296		