


ZWSMD026026

Φ26mm High-temperature Planetary Gearbox

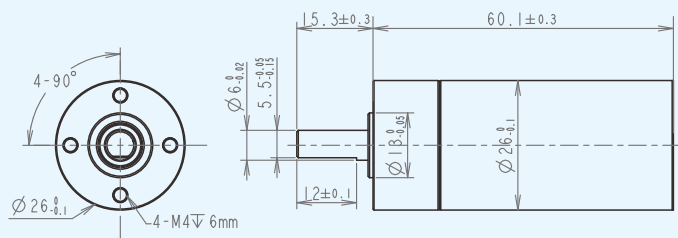

Gearbox Technical Data		
Number of stages		4
Max. continuous torque (Nm)		63
Max. intermittent torque (Nm)		8
Reduction Ratio		1526
Outer Diameter (mm)		26
Gearbox Length L1(mm)		60.1
Max. efficiency (%)		87
Recommended temperature range (°C)		-20~+175
Max. Weight (G)		170
Max. continuous transmittable power (W)		15
Max. intermittent transmittable power (W)		20
Average backlash no load (°)		0.5
Max. axial load (dynamic) (N)		110
Max. radial load (4mm from flange) (N)		180
Bearing at output		ball bearing
Axial play (mm)		0~0.1

* Note: Data above does not include the motor. Specifications can be customized per customer requirements.

Modular assembly		
Integrated Product	Part No.	Number of stages
		4
Brushless Motor	MC2643 Φ26mm brushless motor	Length(mm)
		119.1
Encoder	CB-ST-22	Magnetic Encoder