

ZWBMD024024

Application: Eyebrow pencil, Camera, Health care product, Auto watering device, and etc.


Standard Plastic Geared Motor

Output Power: 0.1W~4.0W

Metal output shaft

Model	Application Parameters								Overall Length	Rated Torque of Gear Box	Instant Torque of Gear Box	Gear Ratio	Gear Box Length
	Rated	At No Load		At Rated Load									
	Voltage	Speed	Current	Speed	Current	Torque							
	VDC	rpm	mA	rpm	mA	gf.cm	mN.m	mm					
ZWBMD024024-4	12.0	1460	70	1259	215	74	7.2	49.9	20000	60000	4	19.1	
ZWBMD024024-6	12.0	973	70	839	215	111	10.9		20000	60000	6		
ZWBMD024024-16	12.0	365	75	315	215	248	24.4	55.8	20000	60000	16	25.0	
ZWBMD024024-24	12.0	243	75	210	215	373	36.5		20000	60000	24		
ZWBMD024024-36	12.0	162	75	140	215	559	54.8		20000	60000	36		
ZWBMD024024-64	12.0	91	75	79	220	835	81.8	62.8	20000	60000	64	32.0	
ZWBMD024024-96	12.0	61	75	52	220	1144	112.2		20000	60000	96		
ZWBMD024024-144	12.0	41	75	35	220	1878	184.1		20000	60000	144		
ZWBMD024024-216	12.0	27	75	23	220	2817	276.2		20000	60000	216		
ZWBMD024024-256	12.0	23	80	20	220	2804	275.0	69.8	20000	60000	256	39.0	
ZWBMD024024-384	12.0	15	80	13	220	4206	412.5		20000	60000	384		
ZWBMD024024-576	12.0	10	80	9	220	6309	618.7		20000	60000	576		
ZWBMD024024-864	12.0	7	80	6	220	9464	928.1		20000	60000	864		
ZWBMD024024-1296	12.0	5	80	4	220	14195	1392.1		20000	60000	1296		

* Above specifications are subject to change without notice, just for reference and customizable according to requirements

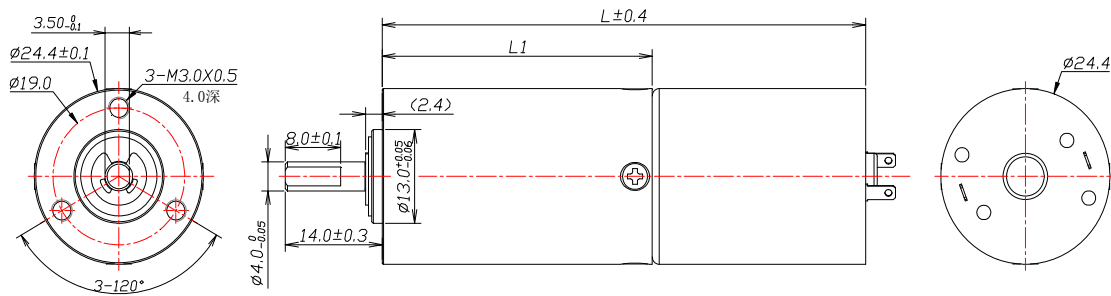

全金属齿轮箱 All Metal Gearbox